

## HAZMAT AND ENVIRONMENTAL DECON SOLUTIONS



Mechanical Room

# ABATEMENT & REMEDIATION TRAILER

### EFFECTIVELY MANAGE ASBESTOS, LEAD, OIL REFINERY AND INDUSTRIAL SPILL OPERATIONS

Our Abatement and Remediation Trailers are a compact, economic, mobile solution perfect for any hazmat operation. Nor-E trailers safely manage asbestos, oil refinery, industrial spill and other hazmat incident needs. Our Abatement Trailers can be quickly implemented on site in under 10 minutes and made ready to carefully and effectively process your crew. Larger models available with office and restroom.

Nor-E boasts the most widely used shower trailers in the world. Nor-E trailer system users include the Australian EMA, Veteran's Administration Hospitals, US Military and responder agencies at every level of government in the United States and Canada.



Leasing Available


Wet Location Interior Lighting

Lead and Asbestos Filtration

Easy to Decon - FRP Seamless Interior

# ABATEMENT & REMEDIATION TRAILER

## HAZMAT SYSTEM

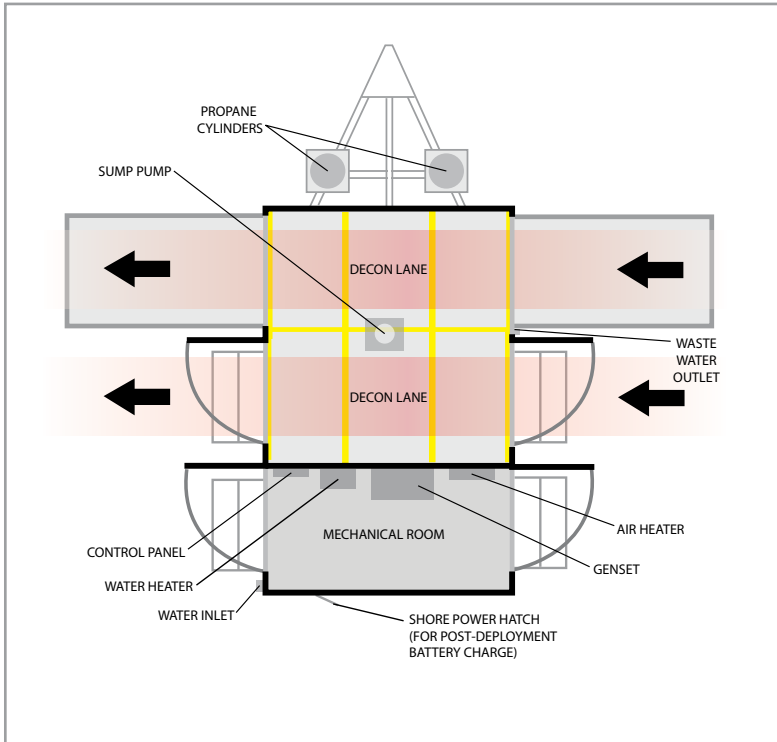

### FEATURES

- Easily accessed by side-entry, side exit low angle ramp and doors
- 1 (one) three-stall decontamination lane (Undress, Shower/Rinse, Dry/Redress)
- 1 (one) large decontamination chamber (Undress, Shower/Rinse, Dry/Redress)
- Each lane includes an on-demand soap induced shower nozzle and an on-demand rinse nozzle
- On-board automatic waste water discharge system
- Raised grid flooring to avoid contact with contaminated water
- Fluorescent interior lights are sealed from chemicals and water
- Sealed and washable biological/chemical resistant interior including FRP sidewalls
- Includes full mechanical system

### MECHANICAL SYSTEM POWERED BY CLEAN BURNING PROPANE INCLUDES:

- Propane 190,000 BTU water heater
- Propane 45, 000 BTU air heater
- 2.5 kW LPG propane powered electrical generator
- 30 amp automatic transfer switch wired to generator and 30 amp service panel with 25 ft. shoreline
- (2) 30 lb. propane tanks
- 100 amp hour deep cycle battery, vented battery box, 6 circuit fuse and 20 amp smart charger
- 14" x 14" 3-speed reversible exhaust fan
- GFCI 15 amp outlet
- 3/4" water inlet

### OPTIONS

- Fresh water storage bladder and transfer pump system for applications where city water is not available
- Waste water bladders, 600 or 1200 USG capacity
- Portable Roller System

### TECHNICAL SPECS

Trailer Dimensions	12'1 x 8'w x 9' h
Curb Weight	4800 lbs.
Hitch Weight	540 lbs.
Trailer Axles	Dual Torflex Torsion
Trailer Brakes	Electric
Wheels	(4) steel 5x4 donut
Tires	(4) 20.5 x 8 x 10 donut
Stabilization Jacks	(2) 2,500 lb.
Drop Leg Jack	7,000 lb. w/ sand pad
Ball Coupler	2 5/16" w/ D.O.T. safety devices
Interior	3/4" exterior grade plywood floor, exterior surface undercoated, interior chemically sealed liner
Lighting	12V end connector (7 way plug)
Fire Extinguisher	(1) 10 lb.
Operations Manual	(1)