

#1
DECON
TRAILER
WORLD
WIDE


DECON TRAILER



MEDeCON 2L-16

DECONTAMINATION SYSTEMS

- BUILT TOUGH
- SAFETY ENGINEERED
- SELF-CONTAINED
- QUICK & EASY SETUP

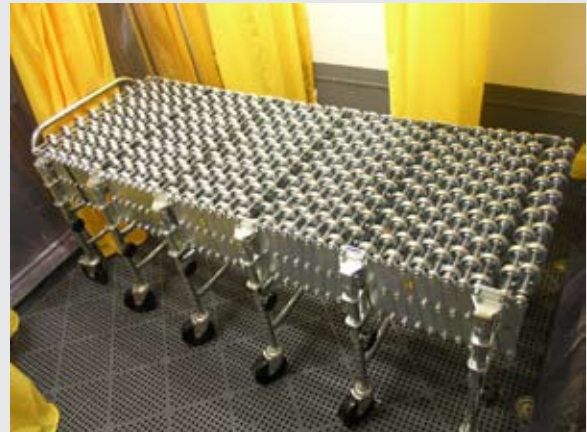

ACCOMMODATE AMBULATORY AND NON-AMB PATIENTS


Accommodate ambulatory and non-ambulatory patient flow seamlessly with MEDecon Decontamination Trailer Systems from Nor E. Built tough and safety engineered for maximum efficiency, MEDecon systems are trusted throughout the world to perform when you need them most. The MEDecon is self contained and operated and deployed easily in just 10 minutes by a single responder; "just add water".



MEDECON 2L-16

DECONTAMINATION SYSTEMS

2-LANE, 16-FOOT

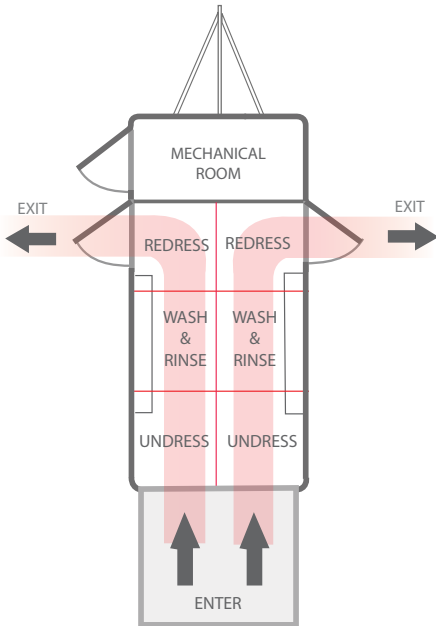

MECHANICAL SYSTEM POWERED BY CLEAN BURNING PROPANE INCLUDES:

- Twin propane 125,000 BTU water heaters
- 1.5" NST Hydrant water inlet w/internal valve and pressure regulator
- 3/4" water inlet
- 45, 000 BTU air heater
- 3.6 kW LPG propane powered electrical generator
- 50 amp, 120/240 Volt, 16 circuit service panel with 50 amp main breaker
- 50 amp automatic transfer switch wired to generator and 50 amp service panel with 25 ft. shoreline
- GFIC 15 amp outlets
- 12V emergency light with timer
- (2) 100 amp hour deep cycle batteries, vented battery box, 6 circuit fuse and 30 amp PC30 power source
- 14" x 14" 3-speed reversible exhaust fan
- (2) 100 lb. propane tanks

FEATURES

- Easily accessed by low angle rear-entry ramp with handrails
- 2 (two) three-stall, convertible decontamination lanes (Undress, Shower/Rinse, Dry/Redress) for ambulatory and non-amb patients
- Each lane includes an on-demand soap inducted shower nozzle and an on-demand rinse nozzle
- On-board automatic waste water discharge system
- Raised grid flooring to avoid contact with contaminated water
- Fluorescent interior lights are sealed from chemicals and water
- Sealed and washable biological/chemical resistant interior including FRP sidewalls
- Includes full mechanical system

OPTIONS

- Fresh water storage bladder and transfer pump system for applications where city water is not available
- Waste water bladders, 600 or 1200 USG capacity
- 18' side awning(s)
- Portable Decon Roller System
- 5.5 kW LPG generator upgrade
- 4-500W telescoping scene lights (NOTE: requires 5.5 kW generator upgrade)
- 24" Aluminum bench, mounted
- IDecon personal care & identity kits
- FirstCare kits for pre-decontamination

MEDECON 2L-16

Trailer Dimensions	16'1 x 8'w x 9'6"h
Curb Weight	6500 lbs.
Hitch Weight	750 lbs.
Trailer Axles	Dual Torflex Torsion
Trailer Brakes	Electric w/ breakaway battery
Wheels	Silver Spoke steel
Tires	Radial, (1) spare
Stabilization Jacks	(2) rear
Drop Leg Jack	8,000 lb. w/ sand pad
Ball Coupler	2 5/16" w/ D.O.T. safety devices
Interior	3/4" exterior grade plywood floor, exterior surface undercoated, interior chemically sealed liner
Lighting	12V end connector (7 way plug)
Exterior Lighting	L.E.D.
Fire Extinguisher	(1) 10 lb.
Operations Manual	(1)



GS-07F-0354N